

Key Features:


- Wide frequency range up to 4.0-8.0GHz full band
- SMA connectorized configuration
- Small size, low cost
- Power handling +5 Watts forward
- Operating temperature -40~+70°C



Electrical Specifications

Part No.	Freq Range MHz	Insertion Loss, dB	Reverse Isolation, dB	VSWR	Forward Power, Watts	Reverse Power Watts	Temp. Range, °C
F2156-0600-67	4.0-8.0	0.5 Max	≥ 20	≤ 1.35	≥ 5	3 Watts	-40 ~ +70
F2156-0550-36	4.5-6.5	0.5 Max	≥ 20	≤ 1.30	≥ 5	3 Watts	-40 ~ +70

Mechanical Structure:

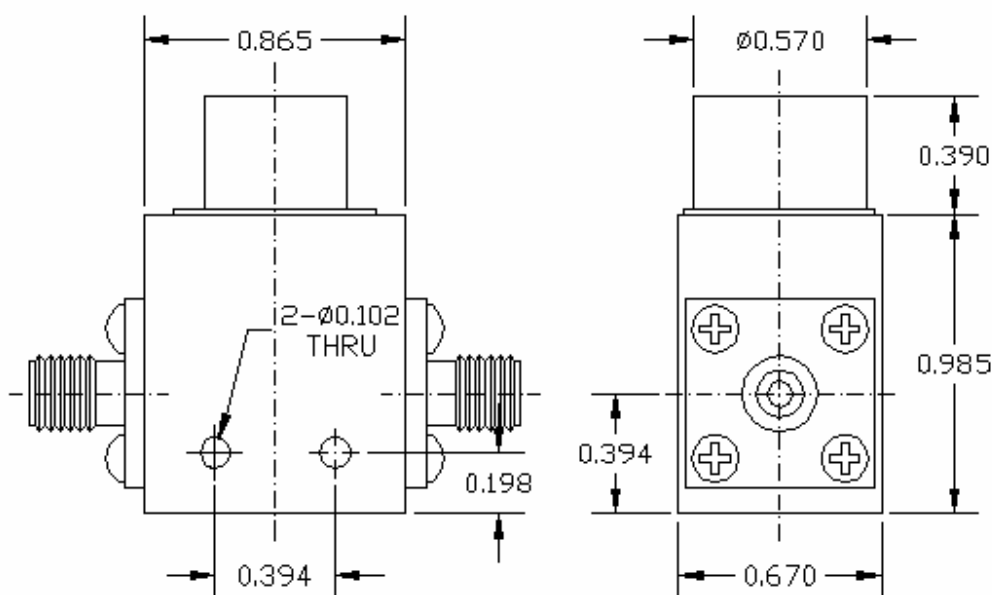

Note: All units in inches

Ordering Information:

F2156-XXXX-XX
 ↓
 Bandwidth, XX%,
 ↓
 Frequency XX.XX GHz,

