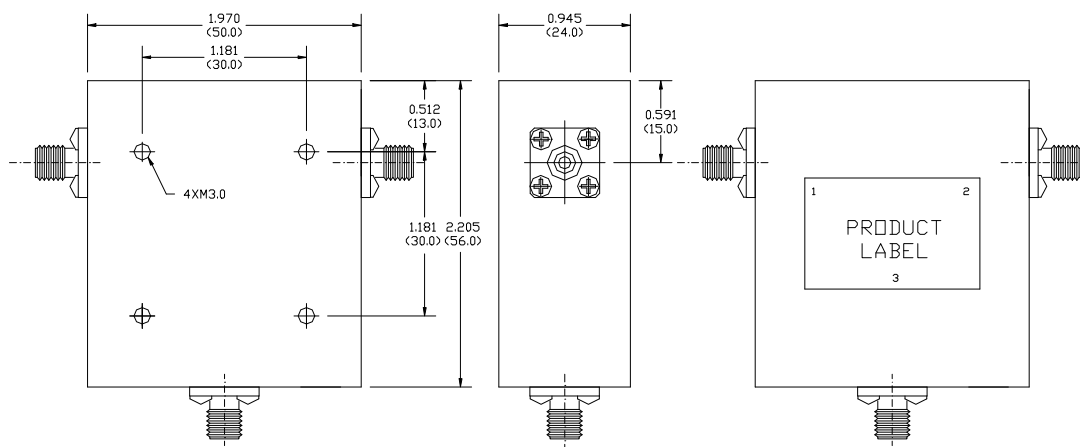


Key Features:

- Frequency range: 150~300MHz, 10% bandwidth
- SMA or N-type connectorized configuration
- Small size, low cost
- Power handling +30 Watts
- Operating temperature -10~+55°C
- Customer specify center frequency and bandwidth

**Electrical Specifications**

Part No.	Freq Range MHz	Insertion Loss, dB	Reverse Isolation, dB	VSWR	Forward Power, Watts	Temp. Range, °C
F2826-0200-10	190-210	0.8 Max	≥ 18	≤ 1.3	≥ 30	-10 ~ +55
F2826-0250-08	240~260	0.8 Max	≥ 18	≤ 1.3	≥ 30	-10 ~ +55
F2826-0260-08	250~270	0.8 Max	≥ 18	≤ 1.3	≥ 30	-10 ~ +55

Mechanical Structure:

Note: All units in inches (mm).

Ordering Information:

F2826-XXXX-XX
 ↓ ↓
 Frequency X.XXX GHz, Bandwidth, XX%,